


NoUVIR is easy to install!

1. Unpack carefully, keep the hardware clean and read the instructions.



2. Mount projector securely. (Any orientation but nose up.)

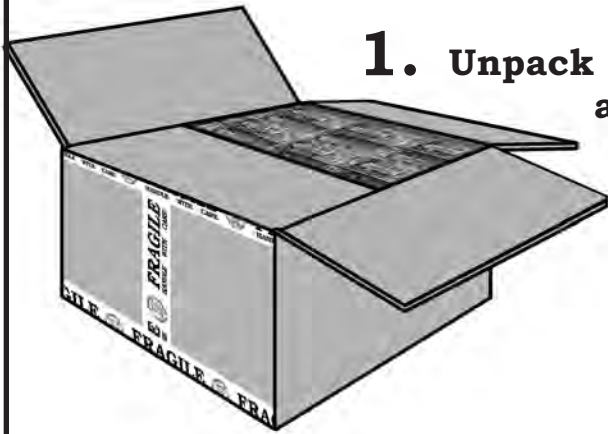


3. Don't forget ventilation. (Min. 45 sq. in. in and out.)



4. Insert the fiber bushing. Plug it in and turn it on to check lamp and circuit.



5. Measure fibers and cut to length.

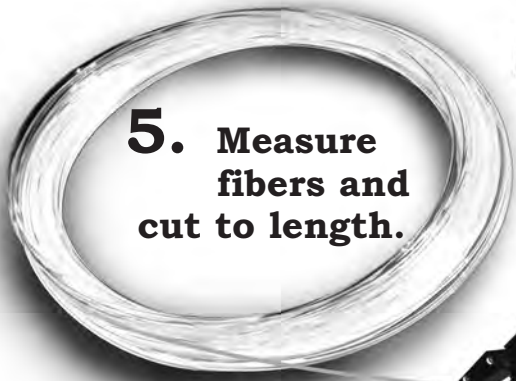


6. Polish each end of each fiber.

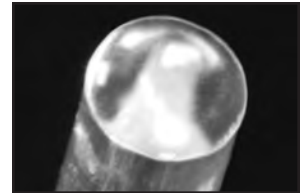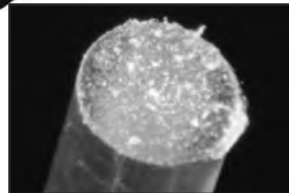



7. Install fibers in bushing. Each fiber should butt against the optical element in the projector nose.



to luminaires' location


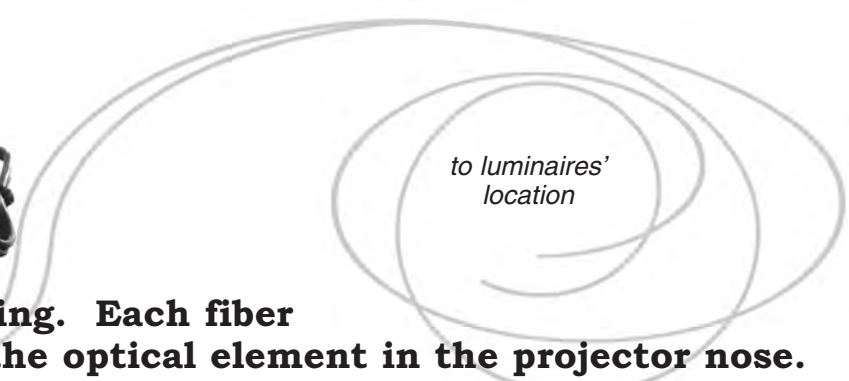


8. Install luminaires.

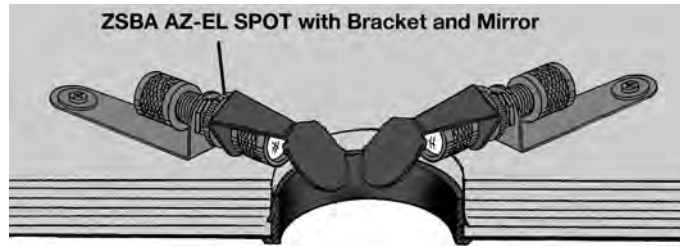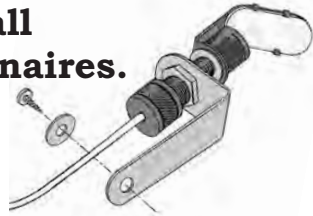


9. Route cut & polished fibers to luminaires. Remember minimum bend radii (6" for 3-mm fiber). Don't glue, tape or over-tightly secure fiber.

Yes

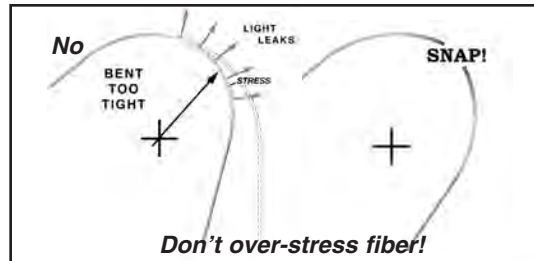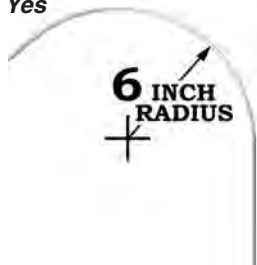


Loosely tie fibers.

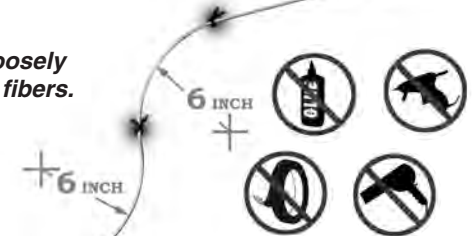


No glues, tapes, hot glues or heat guns.


10. Install fiber into the luminaires. (Recheck that the fiber is fully against the optical element in the projector.)

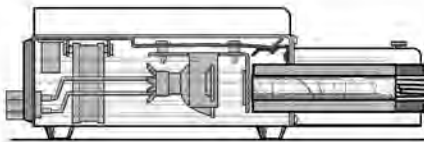

11. Focus luminaires. (Exactly where you want each one.)

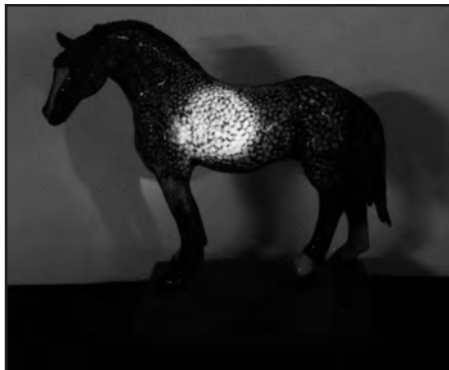

Center tight focused beam on object. Then zoom beam out to cover object.

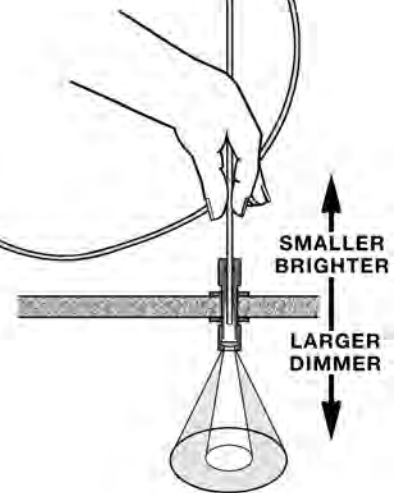

12. Check light levels with a meter. (Standard conservation levels are in the NoUVIR catalog.)



PRESERVATION WARNING: Use extreme care in handling objects, artwork, artifacts, collectibles or other exhibit materials. Always check with conservation personnel for instructions and handling procedures. Use every precaution to protect exhibits. The customer has full responsibility for the safety of every object.